MULTIRAY SERIES

MEDIUM PRESSURE UV AGAINST COMBINED CHLORINE, CRYPTO AND GIARDIA




MULTIRAY SERIES


THE MULTIRAY SERIES IS DEVELOPED FOR EXCELLENT DISINFECTION AND CHLORAMINE REDUCTION IN SWIMMING POOLS, BEING OPTIMIZED FOR THE LOWEST POSSIBLE OPERATING COSTS.

KEY HIGHLIGHTS

- High-grade electropolished stainless steel 316L material providing excellent resistance against Cryptosporidium & Giardia
- Low headloss design, minimizing the need for additional pumping
- Tool free lamp service
- Medium-pressure ULTRATHERM™ 9.000-hour lamp lifetime
- Robust automatic wiper system, reducing the downtime and keeping the UV running optimally
- 6 Easy maintenance and installation
- Sensor removeable during operation for service
- PLC-based controller for easy integration

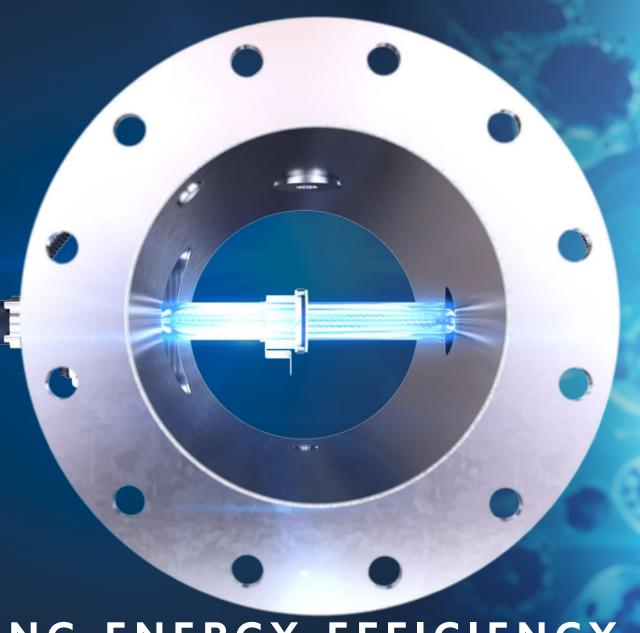

MARKET LEADING ENERGY EFFICIENCY

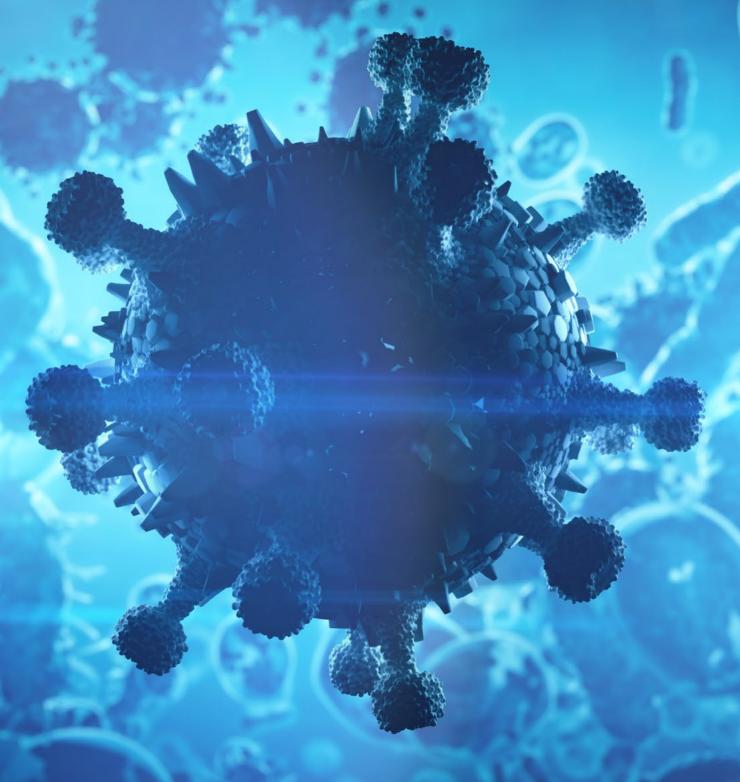

CORE BENEFITS OF UV

UV TECHNOLOGY IS A GLOBALLY ACCEPTED SOLUTION FOR WATER DISINFECTION AND COMBINED CHLORINE REMOVAL.

The demand for cost-efficient solutions to provide high quality disinfected swimming pool water are at an all-time high and will only increase in the future. UV disinfection solves this complex challenge, being able to meet the strictest requirements regarding disinfection and combined chlorine removal.

Improved technological and design configurations have made UV a viable OPEX and CAPEX solution for swimming pools of all sizes.

Choosing to include UV as a secondary disinfection method ensures protection against chlorine resistant pathogens such as Cryptosporidium and Giardia.

The scientifically optimized MULTIRAY systems are designed to remove potential health issues associated with combined chlorine, to ensure a better bather experience.

The ULTRAAQUA UV MULTIRAY systems are easy to install, maintain, and thoroughly cost-optimized. The third-party approvals for performance and quality ensure complete peace of mind, employing the best available solution.



COMPLETE CONTROL WITH ULTRATOUCH™ CONTROL CABINETS

The market-leading ULTRATOUCH™ PLC is the very latest in Siemens touch-screen HMI technology. Relevant interfaces and connectors are available, also offering remote operation and dimming functionality.

OPTIMIZED FOR REMOVAL OF COMBINED-CHLORINE

ULTRAQUA

The compact reactor with its CFD optimized lamp positioning makes the MULTIRAY able to offer maximum hydraulic efficiency throughout the entire UVT range with minimum head loss, making the system optimized for combined chlorine removal.

DISINFECTION FIREWALL

The MULTIRAY ensures excellent protection against cryptosporidium and giardia while removing combined chlorine.

POOL SENSOR

High-quality precision sensor, designed for pool UV. Close sensor valve to clean under operation.

TEMPERATURE CONTROL

Overheating and melting damage is avoided with a temperature sensor.





The high-grade stainless steel offers excellent resistance against chlorides.

EXCEPTIONAL LAMP LIFETIME

The integrated ULTRATHERM™ lamps offer the very latest medium pressure high-intensity UV lamp technology, being optimized for energy efficiency and robustness. The substantial 9.000 hours of lamp lifetime offers market-leading lamp efficiency in UV-C output density.

Additionally, the lamps are operated with an electronic ballast optimizing power use and making lamp function alarm possible.

EASY MAINTENANCE AND INSTALLATION

With a design that allows for easy maintenance, the system is easily installable and can be serviced using no special tools. The sensor is easily cleaned, serviced or replaced under operation due to the integrated valve. Additionally, the unique interlocking electrical and mechanical lamp connectors make servicing of the system safe, quick, and fool proof.

	ò
. :	Manager and
Capacity at 3 m/sec	contact treatment
NOTE! Exceeds Recommended Capacity at 3 m/sec.	C
* NOTE! Exceed	

UV SYSTEM	MP1-1000 MULTIRAY	MP1-2000 MULTIRAY	MP1-3500 MULTIRAY	MP2-3500 MULTIRAY	MP3-3500 MULTIRAY	MP4-3500 MULTIRA			
Product ID	24110	24202	24211	24221	24230	24240			
Approvals	CE (option UL)								
JV LAMPS & MONITORING									
_amp Number	1	1	1	2	3	4			
JLTRATHERM™ MPHI Lamp	1000 W	2000 W	3500 W	3500 W	3500 W	3500 W			
otal Lamp Power	1000 W	2000 W	3500 W	7000 W	10500 W	14000 W			
xpected Lamp Lifetime	9000 Hours								
JV Monitoring	UV Intensity Sensor Pool Specialised								
/ariable Power	Automatic ULTRADOSE™ Pacing 50-100%								
UV CHAMBER									
Connection Size	DN150 / D160	DN200 / D200	DN250 / D250	DN300 / D315	DN300 / D315	DN300 / D315			
Connection Type	EN-1092 Type 01A PN10								
Design Pressure			10	Bar					
Chamber Material			SS316L	1.4404					
nternal & External Finish			Electropolish	ed Inside/Out					
Quartz Type			High Purity Fused Quar	tz Transmittance >95%					
ILTRAWIPER™ System	Manual Wiper (Optional Automatic Mechanical with PTFE/Fibre Rings - Electrical)								
emperature Probe	Yes								
/ent / Drain Ports / Air Port	Prepared for 1/2" Valve (Not Included)								
Minor Wetted Parts	FDA Approved PTFE, PVDF, VITON								
CONTROL CABINET									
Cabinet Material			Powder Pa	inted Steel					
Cabinet Sizes (H x W x D)	600 x 600 x 300 mm	600 x 600 x 300 mm	600 x 600 x 300 mm	800 x 800 x 300 mm	1000 x 1000 x 300 mm	1000 x 1000 x 300 m			
Cable Length			4 Meters (Max 30 Meters - Optional)						
	Wall Mount 0-40 °C Non-Condensing								
nstallation & Ambient				C Non-Condensing					
			Wall Mount 0-40°						
ngress Protection			Wall Mount 0-40° IP54 (Option I	P65/NEMA4X)					
ngress Protection 'hermal Control			Wall Mount 0-40° IP54 (Option I Fan Coole	P65/NEMA4X) ed System					
ngress Protection Thermal Control Control Logic			Wall Mount 0-40° IP54 (Option I	P65/NEMA4X) ed System					
ngress Protection Thermal Control Control Logic Interface/HMI			Wall Mount 0-40° IP54 (Option I Fan Coole PI STD.: 4" ULTRATOUCH™ /	P65/NEMA4X) ed System .C .ADV.: 7″ ULTRATOUCH™					
ngress Protection hermal Control control Logic nterface/HMI CADA Communication			Wall Mount 0-40° IP54 (Option I Fan Coole PI STD.: 4" ULTRATOUCH™ / MODBU	P65/NEMA4X) ed System .C .ADV.: 7" ULTRATOUCH™ S TCP/IP					
ngress Protection hermal Control ontrol Logic hterface/HMI CADA Communication bigital/Analogue 4-20mA I/O			Wall Mount 0-40° IP54 (Option I Fan Coole Pl STD.: 4" ULTRATOUCH™, MODBU ON Signal / Flow Input / UV	P65/NEMA4X) ed System .C ADV.: 7" ULTRATOUCH™ S TCP/IP Dose Output / Alarm Output					
ngress Protection hermal Control control Logic nterface/HMI CADA Communication Digital/Analogue 4-20mA I/O demote Monitoring		A	Wall Mount 0-40° IP54 (Option I Fan Coole PI STD.: 4" ULTRATOUCH™ / MODBU ON Signal / Flow Input / UV	P65/NEMA4X) ed System .C ADV.: 7" ULTRATOUCH™ 5 TCP/IP Dose Output / Alarm Output	ne)				
ngress Protection Chermal Control Control Logic Interface/HMI CADA Communication Digital/Analogue 4-20mA I/O Remote Monitoring	11kW		Wall Mount 0-40° IP54 (Option I Fan Coole PI STD.: 4" ULTRATOUCH™ , MODBU ON Signal / Flow Input / UV Ye larm, Event & Data (UV Dose, UV In	P65/NEMA4X) ed System .C ADV.: 7" ULTRATOUCH™ S TCP/IP Dose Output / Alarm Output es tensity, Flow & Combined Chlori		14.2 kW			
ngress Protection Thermal Control Control Logic Interface/HMI GCADA Communication Digital/Analogue 4-20mA I/O Remote Monitoring Total Power Consumption	1,1 kW	Ai 2,2 kW	Wall Mount 0-40° IP54 (Option I Fan Coole PI STD.: 4" ULTRATOUCH™, MODBU ON Signal / Flow Input / UV Your, Larm, Event & Data (UV Dose, UV In	P65/NEMA4X) ed System .C ADV.: 7" ULTRATOUCH™ 5 TCP/IP Dose Output / Alarm Output	ne) 10,7 kW	14,2 kW			
Ingress Protection Control Logic Interface/HMI COADA Communication Digital/Analogue 4-20mA I/O Remote Monitoring Dog Cotal Power Consumption Dower Supply	1,1 kW		Wall Mount 0-40° IP54 (Option I Fan Coole PI STD.: 4" ULTRATOUCH™, MODBU ON Signal / Flow Input / UV Your, Larm, Event & Data (UV Dose, UV In	P65/NEMA4X) ed System .C ADV.: 7" ULTRATOUCH™ S TCP/IP Dose Output / Alarm Output es tensity, Flow & Combined Chloric 7,2 kW		14,2 kW			
ngress Protection Chermal Control Control Logic Interface/HMI SCADA Communication Digital/Analogue 4-20mA I/O Remote Monitoring Og Total Power Consumption Power Supply		2,2 kW	Wall Mount 0-40° IP54 (Option I Fan Coole PI STD.: 4" ULTRATOUCH™, MODBU ON Signal / Flow Input / UV Your, Larm, Event & Data (UV Dose, UV In	P65/NEMA4X) ed System .C ADV.: 7" ULTRATOUCH™ S TCP/IP Dose Output / Alarm Output es tensity, Flow & Combined Chloric 7,2 kW % +N+PE 50/60Hz		14,2 kW 800 m³/h			
Installation & Ambient Ingress Protection Thermal Control Control Logic Interface/HMI SCADA Communication Digital/Analogue 4-20mA I/O Remote Monitoring Log Total Power Consumption Power Supply SYSTEM Capacity Max Flow 3m/sec. Flow @ 40mJ/cm² 95% UVT (3log Crypto + Germicidal Disinfection)	1,1 kW 190 m³/h 94 m³/h		Wall Mount 0-40° IP54 (Option I Fan Coole PI STD.: 4" ULTRATOUCH™ / MODBU ON Signal / Flow Input / UV Ye larm, Event & Data (UV Dose, UV In 3,6 kW 3x 400VAC +/- 104	P65/NEMA4X) ed System .C ADV.: 7" ULTRATOUCH™ S TCP/IP Dose Output / Alarm Output es tensity, Flow & Combined Chloric 7,2 kW	10,7 kW				

Flow @ 60m]/cm² 95% UVT (3log Crypto + Combined Chlorine Breakdown)

Flow @ 60m3/cm² 98% UVT (3log Crypto + Combined Chlorine Breakdown)

63 m³/h

82 m³/h

143 m³/h

200 m³/h

275 m³/h

400 m³/h

650 m³/h

1000 m³/h*

950 m³/h*

1450 m³/h*

1250 m³/h*

1900 m³/h*

TECHNOLOGY OVERVIEW & VALIDATIONS

THE UV SYSTEMS OF ULTRAAQUA HAS UNDERGONE EXTENSIVE TESTING AND PASSED THE WORLD'S MOST RIGOROUS TESTS FOR VALIDATION AND APPROVAL BY RECOGNIZED LEADING CERTIFICATE PROVIDERS.

This means that reliable and thoroughly tested solutions are guaranteed.



The **DVGW certification** assures that critical technical requirements are met regarding hygiene, safety, and general functionality. DVGW is an unbiased technical-scientific association based in Germany, specialized in gas and water industries.



The AMS (Analog Mixed Signal) verification ensures that the electronic components are compliant with the latest industry-standard, allowing smooth and quick signal transmission among the electrical components used in data tracking and storage.



The **ETV-EU verification** is a third-party validation of new innovative environmental technologies, ensuring product credibility for the buyer.



CUSTOMIZED SOLUTIONS

ULTRAAQUA EMPLOYS AN ENTIRE DEPARTMENT OF ENGINEERS - SPECIALIZED IN THE DESIGN AND CONSTRUCTION OF UV SYSTEMS.

Multiple years of experience within relevant applications, makes it possible to alter and adjust any standard UV system to accommodate the specific requirements.

The customization requirements can vary from adjustments such as reactor shape or flange size, to adding new advanced features. This makes the ULTRAAQUA design department function as a consulting agency, working towards an optimized customized solution. This means that we can ensure on site validation to various standards, fitting your exact requirements.


The following possibilities are available for all customized UV units:


Customized services

- Integrated CFD Analysis
- Particle tracing modeling analysis
- Oetermining fluence rate
- Physical testing
- Onsite validation testing
- Advanced UV disinfection support

Comprehensive technical knowledge makes the engineers able to assist with installation details such as weir design, water level control devices, and many other project-specific matters.



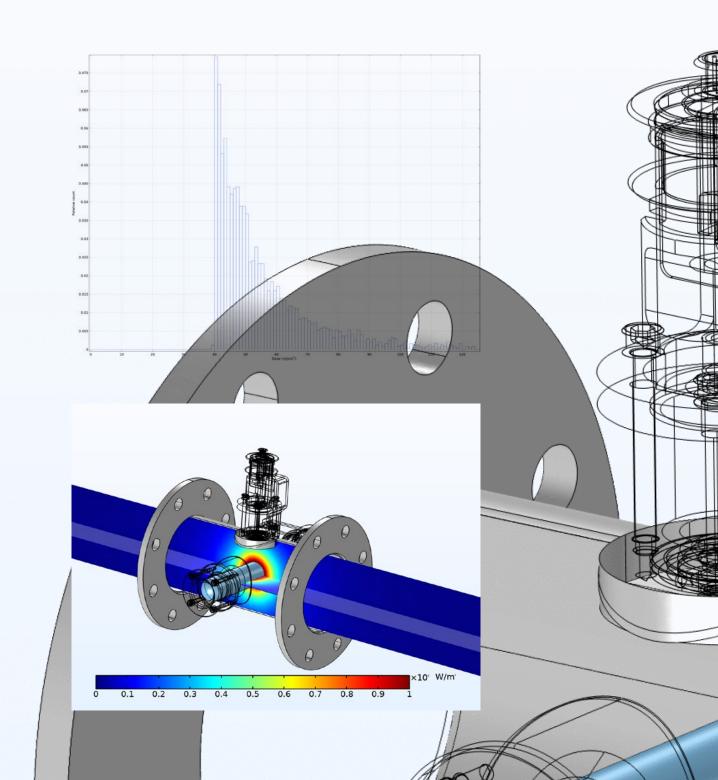

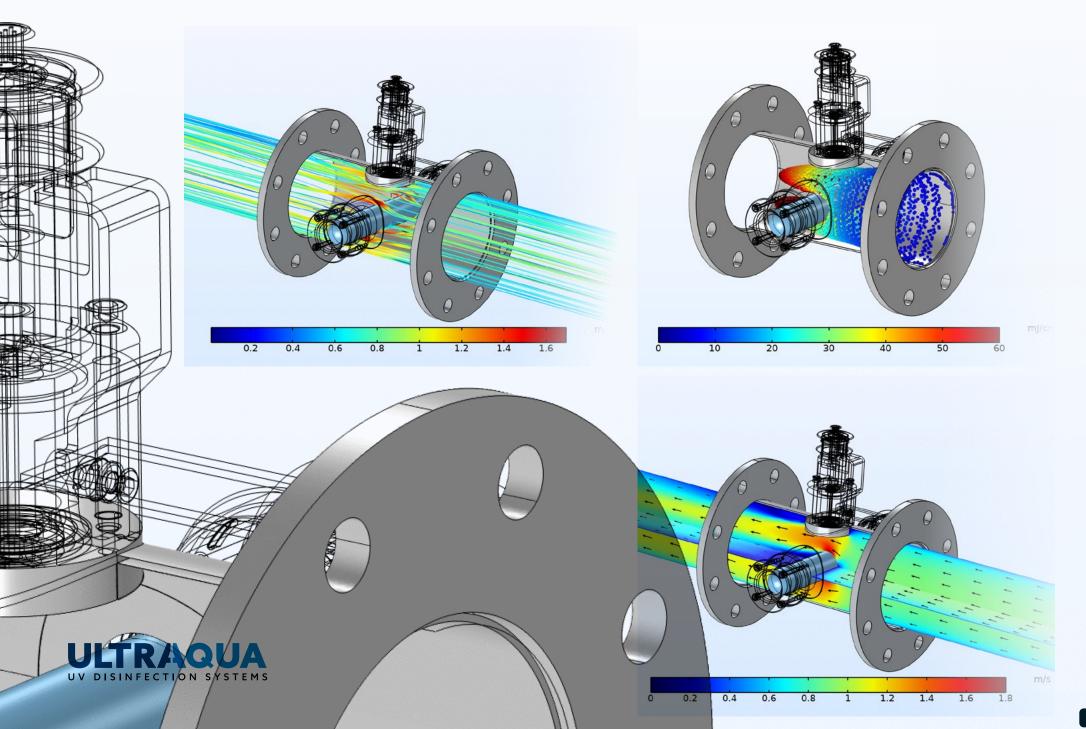

R&D CAPACITIES

SINCE 1996, THE R&D DEPARTMENT HAS BEEN THE BACKBONE OF ULTRAAQUA.

Employing the brightest industry specialists with great diversity for continuous innovation has been vital to the success of the company.

The ULTRAAQUA R&D department conducts, supports, and pioneers some of the latest developmental work within the water industry. These projects are often done in collaboration with specialists from municipalities, universities, top tier consultancies and international companies. The projects are primarily focused on developing unique and advanced chemical free disinfection solution for some of the worlds most complex water quality problems.

Members of the Ultraaqua team staff include many engineers within chemistry, water treatment, mechanics, computational fluid dynamics and process control. Several scientists and Ph.Ds. Ultraaqua scientific staff are involved in many EU and national funded science projects generating leading edge knowledge. In house Computational Fluid Dynamics (CFD) staff has modelled the MULTIRAY range and optimized design for disinfection and combined chlorine reduction.

The comprehensive in-house testing area facilitates optimal conditions for research, development, and innovation. With the ability to run full scale pilot trials and a 40 ft research container to support local testing combined with cutting edge engineering, makes us confident that ULTRAAQUA is the right partner for your organization.

This ultimately allows ULTRAAQUA to position itself amongst the industry leaders within UV disinfection, supplying customers with the best available solutions.







COMPANY HISTORY

ULTRAAQUA IS AN INTERNATIONAL MANUFACTURER OF ADVANCED UV WATER DISINFECTION SYSTEMS FOR A WIDE RANGE OF WATER TREATMENT APPLICATIONS.

The company was founded in 1996 by two Danish scientists, with the mission of solving the increasing global water safety challenges, by combining extensive research, innovation, and technology. Today, more than 10.000 UV disinfection systems have been supplied worldwide, to help create a more sustainable world.

ULTRAAQUA operates through a carefully selected partner network, with activity in more than 120 countries. The partner network has been key to the success of ULTRAAQUA, making it possible to deliver cutting-edge UV disinfection systems across the globe.

Continuous research and innovation activities have made it possible to maintain the position of delivering cutting-edge solutions to clients with diverse requirements in different applications.

Global experience combined with advanced knowledge of dealing with varying customer requirements, ensures an optimal solution to accommodate every client. Combined with a dedicated support experience, a streamlined operational process is guaranteed.





AQUAANALYTIC LLC



Business Center 1, M Floor, The Meydan Hotel, Nad AlSheba, Dubai, U.A.E.

+31 715 69 01 51

https://aquaanalytic.ae info@aquaanalytic.ae