

ZeeWeed* Ultrafiltration (UF)

FACT SHEET

Model: ZW700B-9060

Full Model Name: ZW700B-9060/UF10/7B/XA/0.8/55

Description and Use

As a pioneer of membrane technology Veolia leverages decades of research, development, and operational experience to offer the most advanced ultrafiltration technology in the market.

The ZeeWeed 700B-9060 (Figure 1) line of products contains our SevenBore* fiber technology with an inside-out flow orientation. The SevenBore fiber is regarded as the most robust polyethersulfone (PES) product on the market.

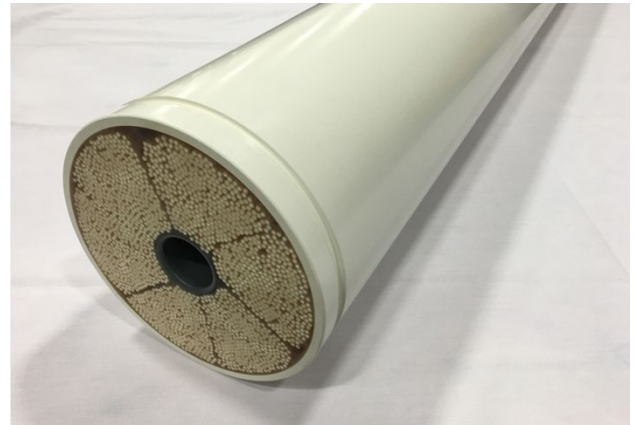


Figure 1: ZW700B-9060

Product Specifications Element Data

Description	ZW700B-9060/UF10/7B/XA/0.8/55
Material housing	PVC
Housing length	1537.5 +/-1.0 mm (60.5 +/- 0.04 inch)
Permeate connection ID	42.6 +/- 0.5 mm (1.7 +/-0.02 inch)
Element OD	220 mm (8.66 inch)
Weight	24 kg (53 lbs.)

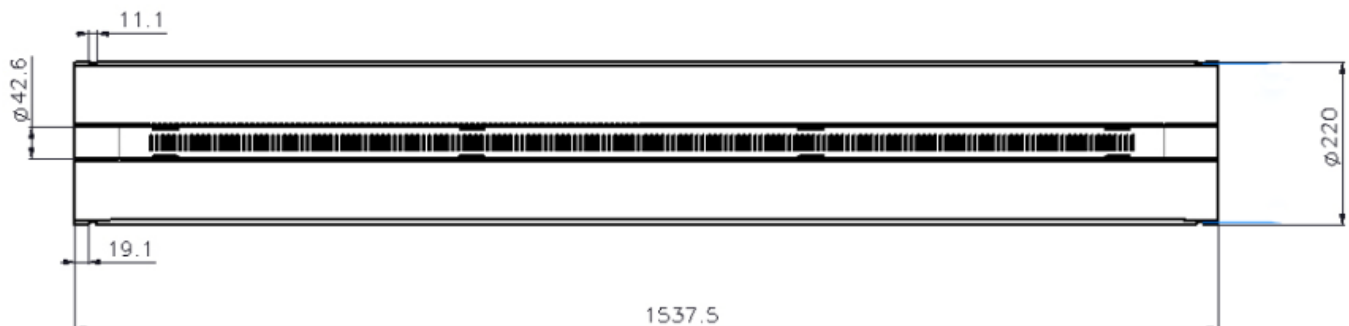


Figure 2: ZW700B-9060 Dimensions (mm)

Description	Measurement
Maximum operating temperature	40°C (104°F)
Max. Operating Pressure, installed vertically with end-caps	5 bar (72.5 psi)
Max. Operating Pressure, installed horizontally in housing	See specifications of membrane housing supplier
Trans Membrane Pressure (TMP), typ. operation	<1.0 bar (<14.5 psi)
TMP maximum	2.5 bar (36 psi)
Backwash/forward flush	250 l/m ² h (150 gfd)
pH range during operation	2 to 11

Membrane Type

Description	Measurement
Material	PES
Type	SevenBore
Diameter bores ID	0.8 mm (0.03 inch)
Area	55 m ² (592 ft ²)

Cleaning

Description	Measurement
Cleaning pH range	1.0-13.0
Disinfecting Chemical:	50 to 200 ppm
Hypochlorite (NaOCl)	
Hydrogen Peroxide	100 to 200 ppm



Figure 3: ZW700B-9060 Spacer Ring

General Properties

- UF membrane – for optimal removal of particulates, bacteria and viruses
- PES membrane fibers with 7 bores – provides high mechanical strength (>10x that of single fibers) and chemical resistance
- Inside-Out filtration – eliminates air scouring step and additional related equipment
- Modules can be mounted vertically, or installed horizontally in pressure vessels. If used in horizontal orientation, two spacer rings per module are required (figure 3), along with any permeate interconnectors
- Contact Veolia for detailed drawings and assistance with sizing and ordering element housings

Storage and Handling

All elements are filled with glycerin when new, which is part of the fiber manufacturing and preservation process. Elements must be stored in a dry and normal ventilated location, away from any sources of heat, ignition, and direct sunlight in the original packing. The storage temperature must be between 5°C and 35°C (45°F to 91°F).